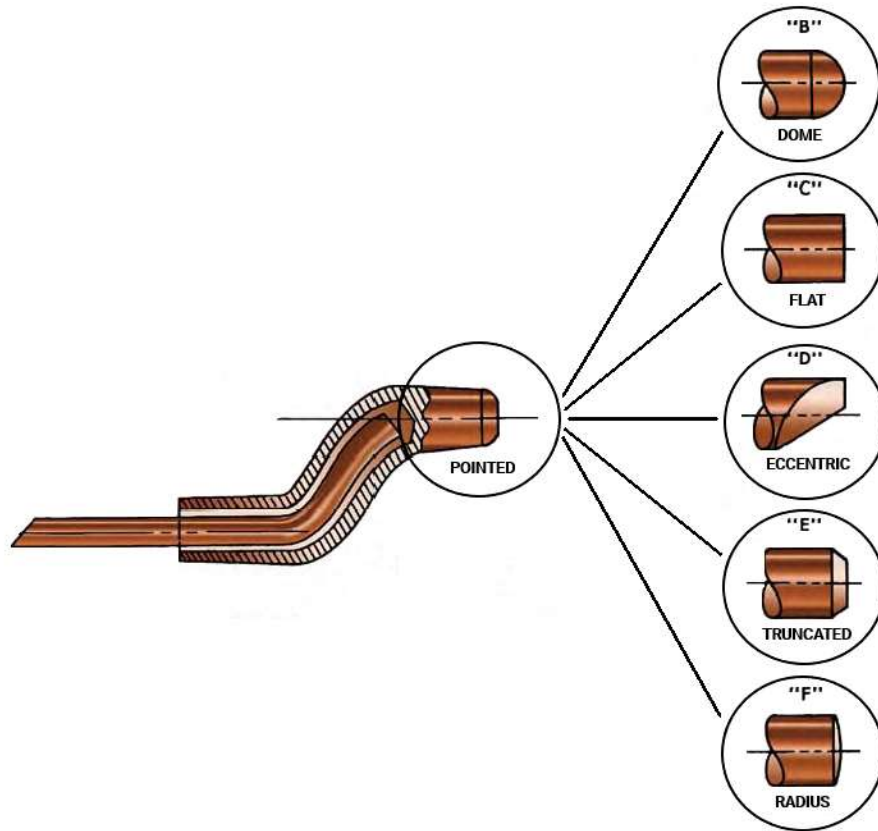


## DOUBLE BEND ELECTRODE



*IMAGE FOR INDICATIVE PURPOSES*

### APELLATION

[NOSE][CLASS][TAPER][CODE(L)]-[CODE(O)]

Example: B2410-09 (in yellow). The electrode will therefore have a dome nose, copper class 2, a 4RW taper, a total length of 2-1 / 2 "and an offset distance of 9/16".

NEZ	CLASSE	CÔNE	LONGUEUR (L)	CODE (L)	DÉCALAGE (O)	CODE (O)
A, B, C, D, E OU F	2	4RW OU 5RW	2-1/2"	10	9/16"	09
			2-3/4"	11	3/4"	12
			3"	12	1"	16
			3-1/4"	13	1-1/4"	20

\* Other sizes may be available on special request

\* Although we recommend the cooling tube (improves the life of the electrode because it is well cooled), it is possible to request the electrode without a tube. If it is the case, N / T should be added at the end of the product code (example: A2408-11N / T).